


EXTERNAL IP RELAY 1 OUTPUT, 1 INPUT

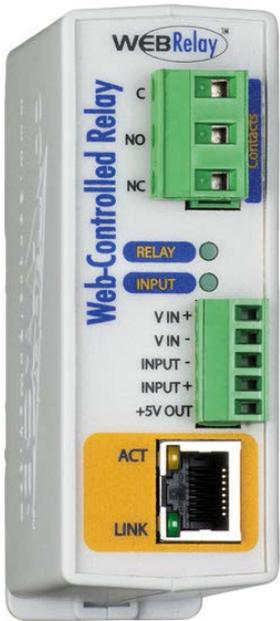

WebRelay™ provides reliable remote relay control and discrete signal monitoring over any IP network. WebRelay can be used in countless applications, including pump and motor control, security lock systems, remote reboot, and lighting control. WebRelay's powerful and flexible design make imagination its only limit. In addition to its built-in relay, WebRelay has an optically-isolated input that can be used to monitor the state of devices, control the relay, or control a remote relay somewhere else on the network. This feature is useful to extend the output of a PLC to another building, or to allow a switch or sensor to control a device at a distant location.

ORDER NUMBER:
01397-001

FEATURES:

- No programming required.
- Full control using a standard web browser or textbased XML messages.
- Can operate as a Modbus TCP/IP slave.
- Password protected.
- 12-Amp relay contacts.
- On/Off and Pulse modes.
- Optically-isolated input can be used for:
 - Monitoring
 - Relay control
 - Remote relay control (Peer to Peer)
 - Automatic Reboot controller mode for remote reboot of computers and network devices.
- Selectable TCP ports.
- Two removable terminal connectors included.
- Rugged DIN-Rail/wall mountable enclosure.
- 9-28 VDC power supply

WEBRelay™ Setup

Network Password Relay/Input Control Page Setup Relay Control Page

Relay/Input:

Relay Mode: Standard Automatic Reboot

Ping IP Address: 192 . 168 . 1 . 15

Successful Ping Period: 60 secs

Unsuccessful Ping Period: 10 secs

Delay Before First Ping After Reboot: 120 secs

Reboot Timer 1 (T1): 10 secs

Reboot Timer 2 (T2): 5 secs

Reboot Timer 3 (T3): 2 secs

Reboot Options: pulse off T1 secs

Failed Pings Before Reboot: 5

Max Reboot Attempts: 10

Remote Relay Options: no remote relay control

Remote Relay IP Address: 192 . 168 . 1 . 3

Remote TCP Port: 80

Relay #: 0

Password: ●●●●●●●●

Keep Alive: YES(No TX State)

Submit Reset

Automatic Reboot Options

WEBRelay™ Setup

Network Password Relay/Input Control Page Setup Relay Control Page

Relay/Input:

Relay Mode: Standard Automatic Reboot

Pulse Duration: 1.5 secs

Relay Options: set relay equal input (init at powerup)

Remote Relay Options: no remote relay control

Remote Relay IP Address: 192 . 168 . 1 . 3

Remote TCP Port: 80

Relay #: 0


Password: ●●●●●●●●

Keep Alive: YES(No TX State)

Submit Reset

Relay Options

SHIFT BELL CONTROLLER

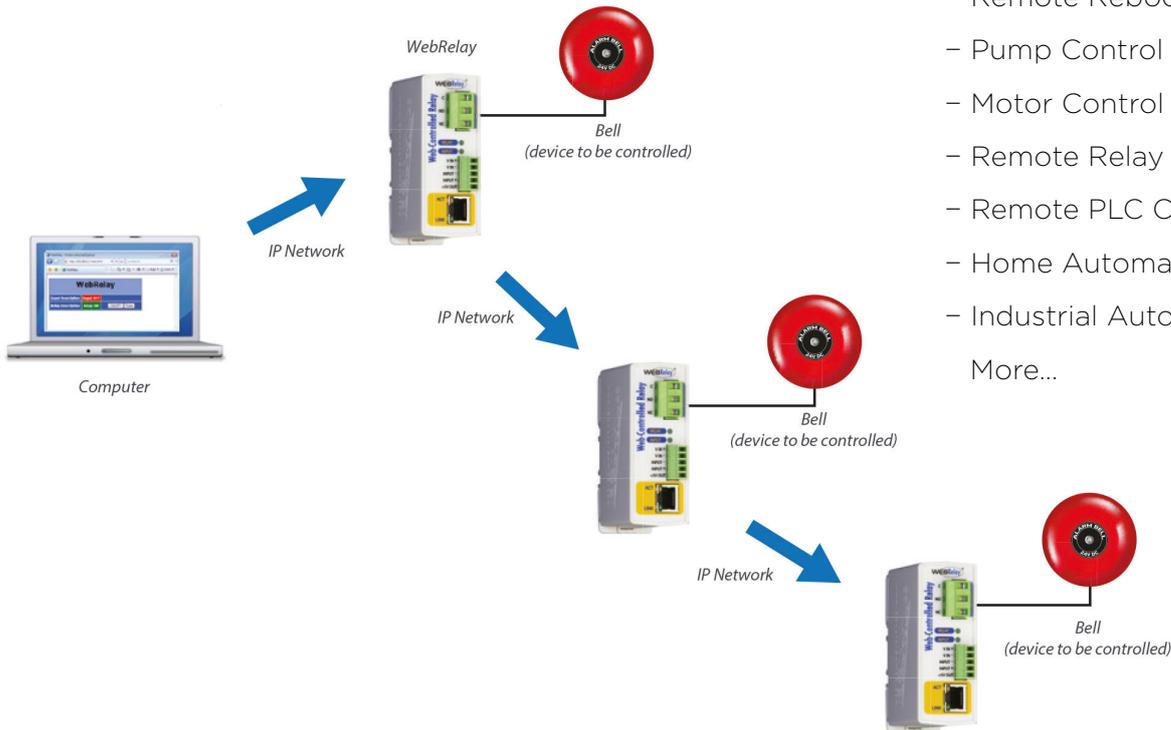

ADDITIONAL APPLICATIONS

- Remote Reboot
- Pump Control
- Motor Control
- Remote Relay
- Remote PLC Control
- Home Automation
- Industrial Automation
- More...

SPECIFICATION

| | | |
|--------------------|------------------------|--|
| POWER REQUIREMENTS | Voltage | X-WR-1R12-1I5-I: 9-28VDC |
| | Current | 460mA Max |
| RELAYS | Number of Relays | 1 |
| | Max Voltage | 240VAC, 30VDC |
| | Max Current | 12A |
| | Contact Type | SPDT (Form 1C) |
| | Load Type | General Purpose |
| | Contact Resistance | < 30 milliohms initial |
| | Environmental Rating | Over voltage Category II, Pollution Degree 2 |
| | Relay Modes | ON/OFF or Pulsed |
| DIGITAL INPUTS | Pulse Timer Duration | 0.1 to 86,400 Seconds (1-day) |
| | Number of Inputs | 1 |
| | Type | Optically-Isolated |
| | Voltage Range | 4-12VDC |
| | Current | 4mA @ 4V, 16mA @ 12V |
| | Minimum Hold Time | 62.5mS |
| | Input Isolation | 1500V |
| NETWORK | Input Functions | Monitor, Local Relay Control, Remote Relay Control |
| | Type | 10/100 Base-T Ethernet Port |
| CONNECTORS | Setup | Static IP address assignment. TCP port selectable |
| | Power/Input | 5-Position Removable |
| | Relays/Inputs | 3-Position Removable |
| LED INDICATORS | Network | 8-pin RJ-45 |
| | Number of LEDs | 4(Digital input voltage applied, Relay coil energized, Network linked, Network activity) |
| PHYSICAL | Operating Temperature | -40°F to 135°F |
| | Size | 1.4 (w) x 3.9(l) x 3.1 (h) inch (not including connector) |
| | Weight | 0.31 lb |
| | Enclosure Material | Lexan 940 Polycarbonate Plastic |
| | Enclosure Flame Rating | UL94 V0 |

| | | |
|-------------------|--|---|
| PROTOCOLS | HTTP, XML, Modbus TCP/IP | |
| LOGGING | Log File Size | 512K (max 28,829 logs) |
| | Storage | Nonvolatile Flash |
| | Buffer Architecture | Circular Buffer |
| | Log data can be periodically read and stored on a computer | |
| ADVANCED FEATURES | BASIC interpreter | |
| | Remote services | Avoid most firewall issues with outbound connection to Web Services |
| PASSWORD SETTINGS | Password protection on setup page | Yes |
| | Password protection on control page | Optional |
| | Password Encoding | Base 64 |
| | Max Password Length | 10 Characters |