

2N[®] INDOOR VIEW



ANSWERING UNIT WITH A 7" HD TOUCHSCREEN

The main feature of the 2N[®] Indoor View answering unit is a 7" touchscreen with a wide viewing angle. The tempered glass surface and stylish design are the perfect choice for any luxury residential project. To install the device, all you need is a UTP cable and an installation box. Our custom operating system is your guarantee of reliable operation and simple configuration.

FEATURES & BENEFITS

7" HD TOUCHSCREEN

Your customer will appreciate how easy it is to operate the unit on the large display. The home screen even provides the current weather forecast.

FULL SCREEN VIDEO CALLS *

We've enlarged the video call preview. This means residents can even read a courier's name tag with ease.

STYLISH DESIGN

A luxury penthouse deserves a great looking unit. Offer the 2N® Indoor View to ensure you win your project.

RESIDENTS' PRIVACY IN SAFE HANDS


The 2N® Indoor View runs on our very own operating system. We've made sure that no one can listen in or record residents' conversations.

FIRST CONFIGURATION FROM YOUR OFFICE

Save time and money. You can set up all the units in a project remotely without the need to travel to the installation site.

PRODUCED AND DEVELOPED IN EUROPE

We pride ourselves on the premium materials used in manufacturing. Your customers will be pleased with the quality and will be happy to come back in the future.

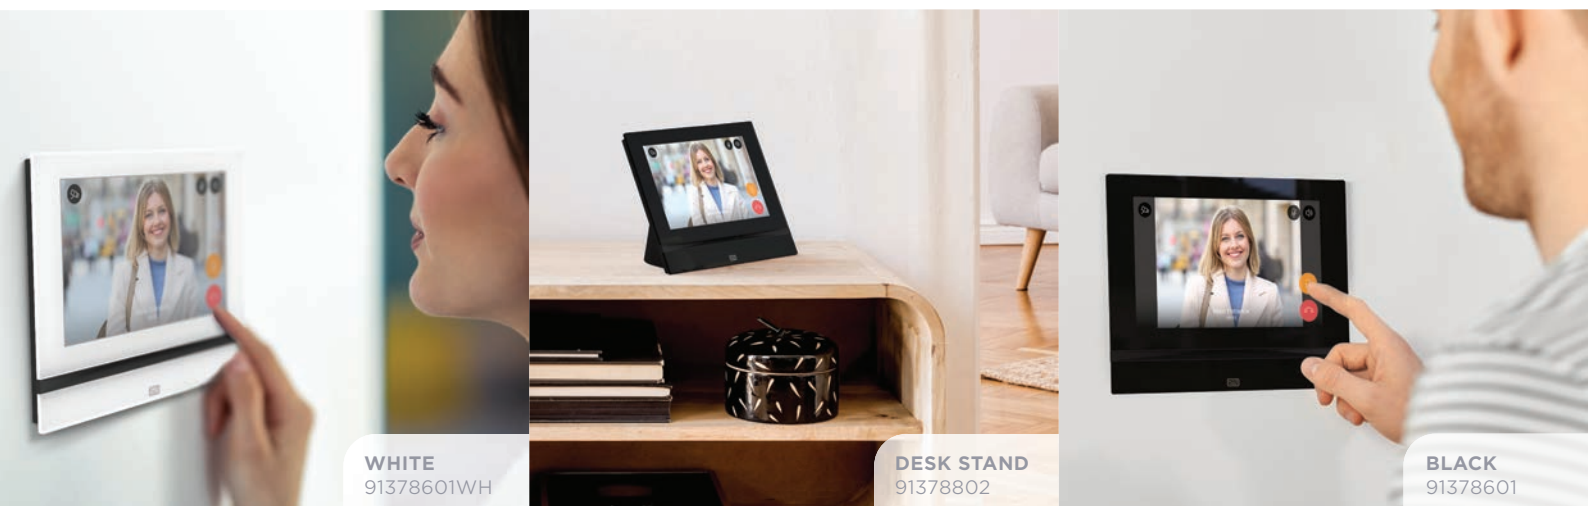

TECHNICAL PARAMETERS

POWER SUPPLY

Type	12 V / 1 A DC or PoE
PoE	802.3af
Reverse polarity protection	Yes

USER INTERFACE

Controls	capacitive touch panel
Operation	Press and hold the RESET button to restore factory settings, 3 LED status indicators

AUDIO

Microphone	Integrated
Speaker	Integrated, 2 W
Induction loop output	600 mV RMS
Codecs	G.711, G.722, G.729, L16/16 kHz

VIDEO

Display	7" display, resolution 1024 x 600 px, 640 x 480 px
Codecs	H.264, MJPEG

INTERFACE

LAN	10/100BaseT, RJ-45
Recommended cabling	Cat5e or higher

DOORBELL INPUT

Input type	Switching contact (button/relay)
Contact type	Normally open (NO)
Contact parameters	Up to 50V/5mA, DC

MECHANICAL PROPERTIES

Operating temperature	0 to 50°C
Storage temperature	-20 to 70°C
Relative operating humidity	10 to 90 % (non-condensing)
Recommended altitude	0 to 2000 m
Dimensions (W x H x D)	193 x 157 x 50 mm
Weight	555g

WARRANTY 5-years warranty see https://www.2n.com/en_GB/support/warranty-and-repairs

* Wide screen calls will be compatible only with some 2N intercoms.